


ISORWCARD

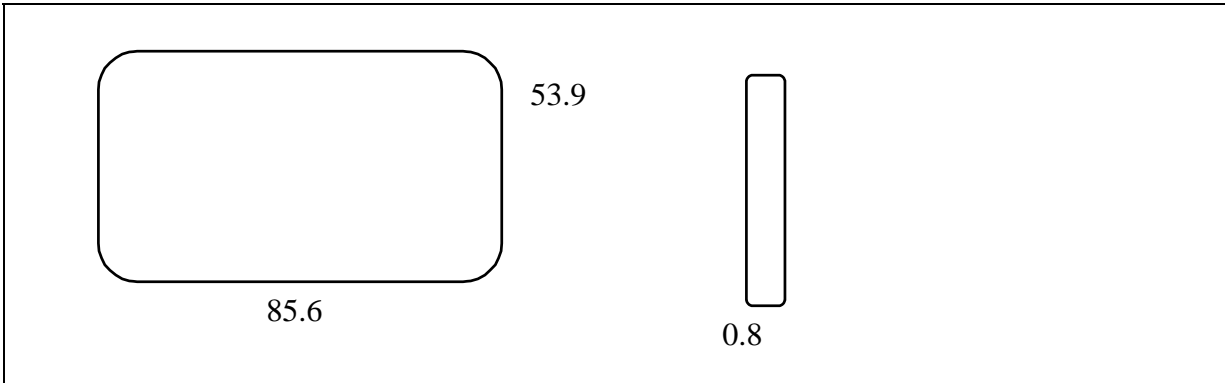

Part Number	ISORWCARD
Transponder	Low frequency, passive, AM RF, Bi-phase/Manchester, RF/8/16/32/64, R/W, OTP. ISO11785/784 FDX formatting available. 224 bits.
Frequency	125 kHz \pm 6 kHz (134.2 kHz available)
Size	85.6 mm x 53.9 mm x 0.8 mm
Material	PVC
Color	White
Weight	< 3 g
Read Range	up to 35 cm, (reader dependent)
Operating temperature	-10 to +50 C
Notes	Accordance to ISO norms 7816-1 ID-1 Triple use: RFID, visual (if printed), magnetic strip identification (if included) Can be punched for inserting hooks, clips, etc. Printable with thermal transfer printing or offset printing