


# IT100x5FLRO

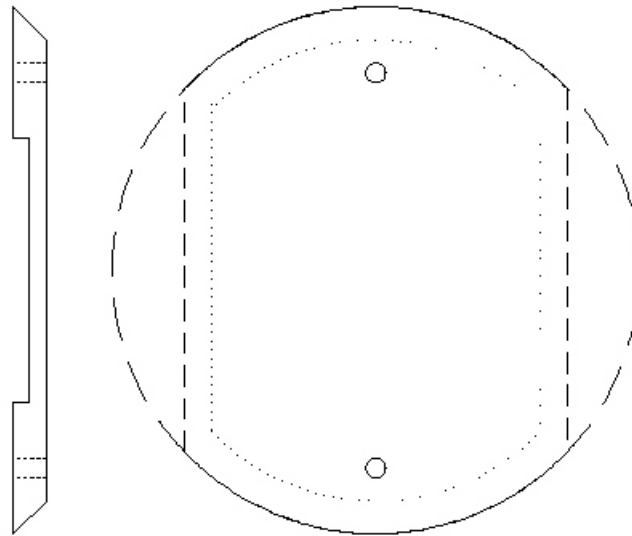

## Specifications

Description	Passive Low Frequency RFID Tag in a plastic puck for on-floor placement
Features	<ul style="list-style-type: none"> <li>• Protection from foot and machine traffic</li> <li>• Glue-able on concrete floor or use mounting holes</li> <li>• Attractive and can be printed</li> </ul>
Frequency	125 kHz $\pm$ 5 kHz
Modulation/Encoding	ASK, Manchester (biphase available)
Speed	RF64, -FS: RF32
Memory	64 bit read only, 40 bit serial number (other sizes available)
Read range	Reader dependent
Dimensions	round: 100 x 6 mm (4 x 0.2 inch). -02: oblong 100 x 60 x 6 mm (4 x 2.4 x 0.2 inch)
Operating temperature	-10° to +50° C
Material	ABS, black
Ordering	IT100x5FLRO -02 -FS

*it100x5flro 1/1 rev sep08*  
Specifications and functionality are subject to change without notice